


1130 134x24 mm








Patented




ICIM
Product certification n. 020AW/0
Classification 3-6-1-3/3-4




LAPI
Attestation of fire
Reference standard UNI EN 1634-2
ed. 2009

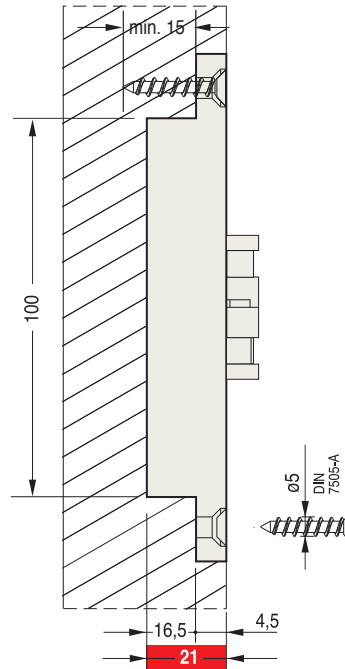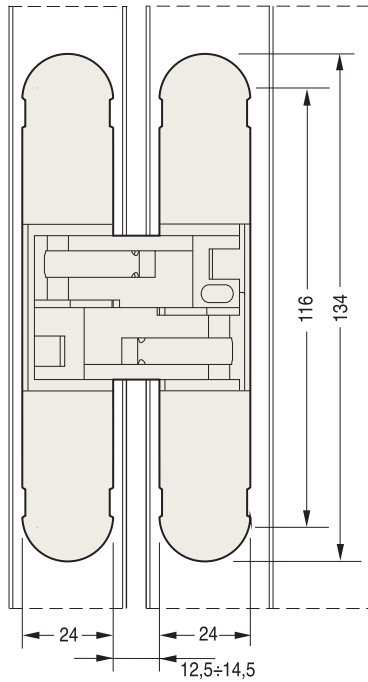


Mortise dimensions

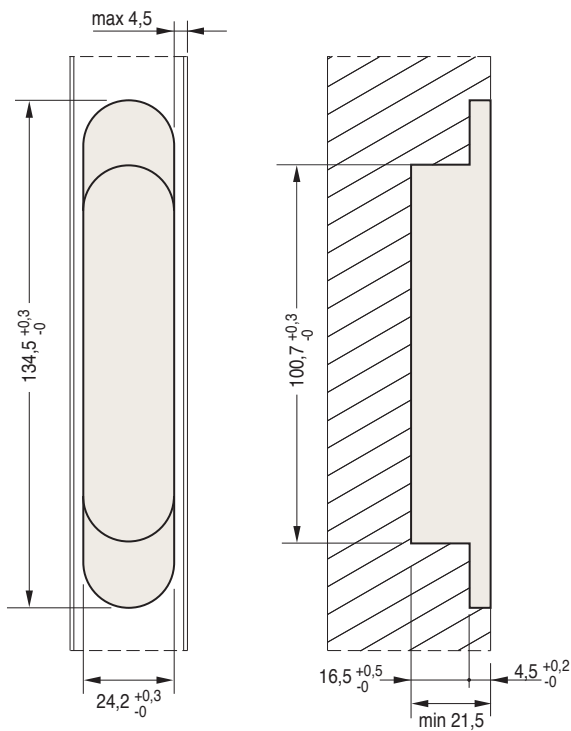


Cross section

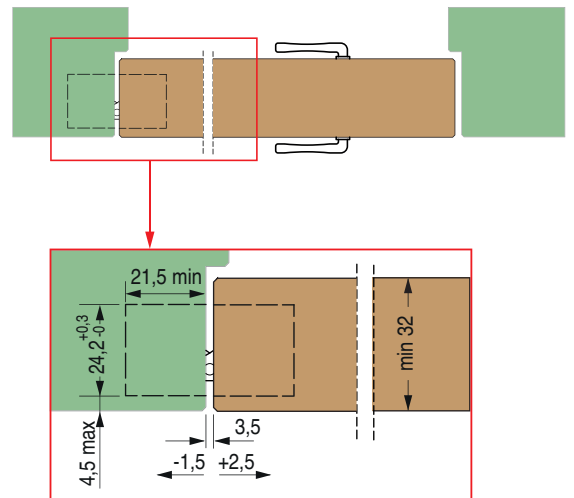



1130 134x24 mm

Load capacity

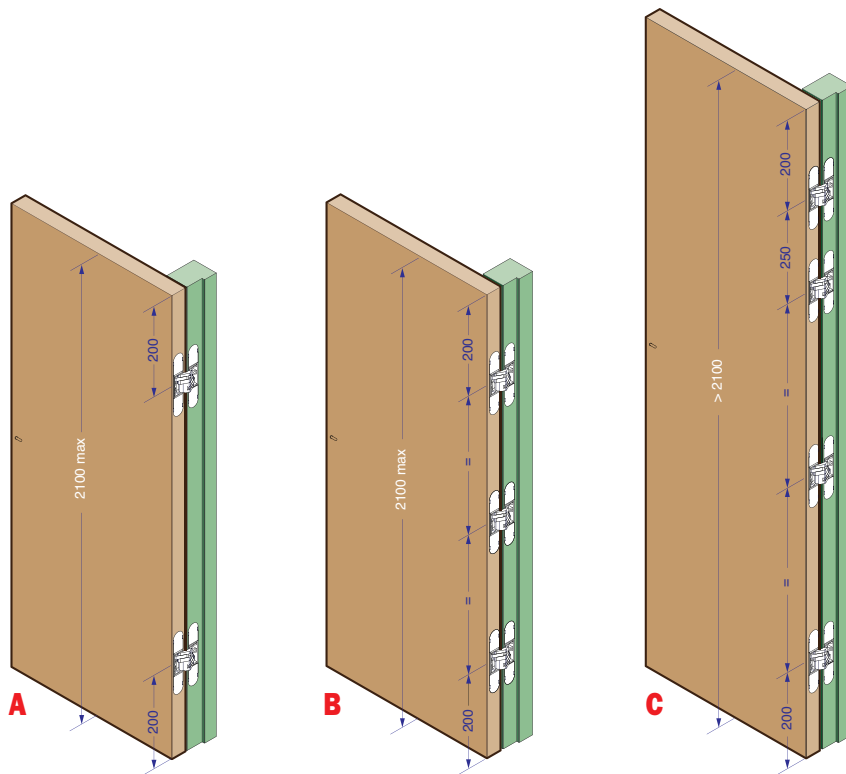

Wings
850 mm wide


- up to 2100 mm high
A - 2 hinges 40 kg
B - 3 hinges 60 kg
- over 2100 mm high
C - 4 hinges 60 kg


Before using a door
closer, contact us

All hinges must be
adjusted

Lubricate the hinges at least once
a year



Installation

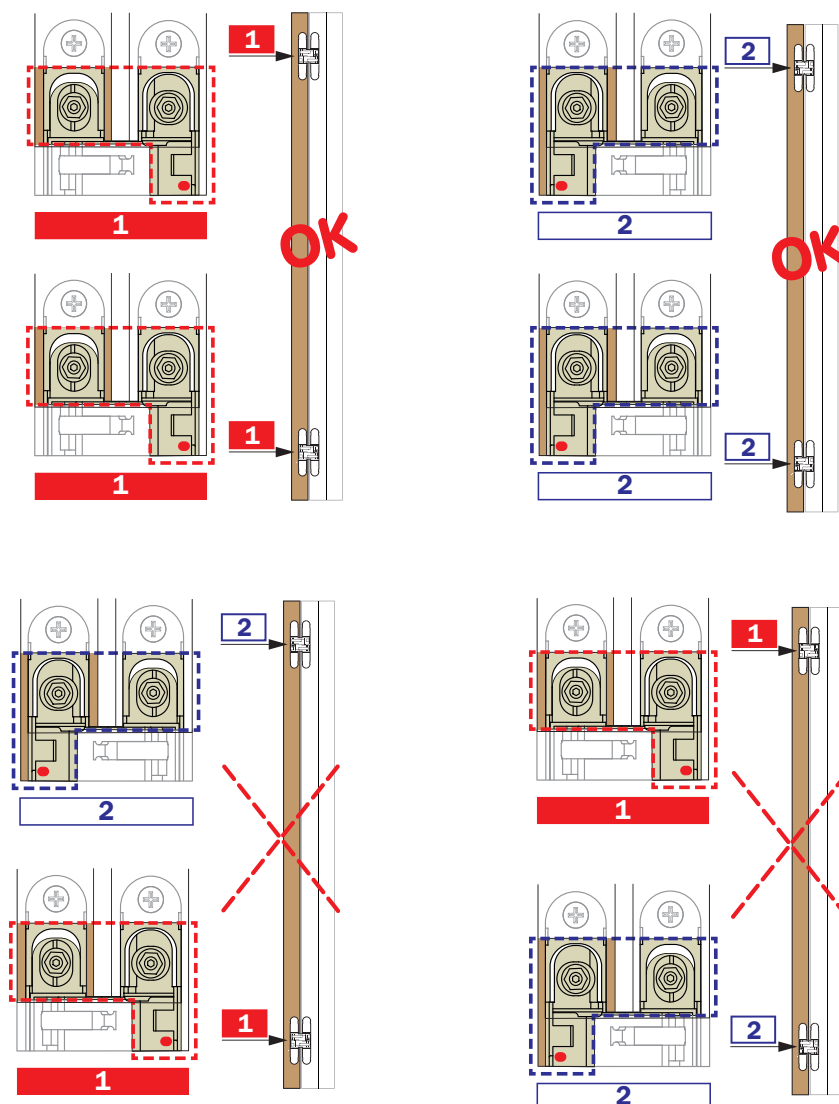





1130 134x24 mm

Vertical adjustment

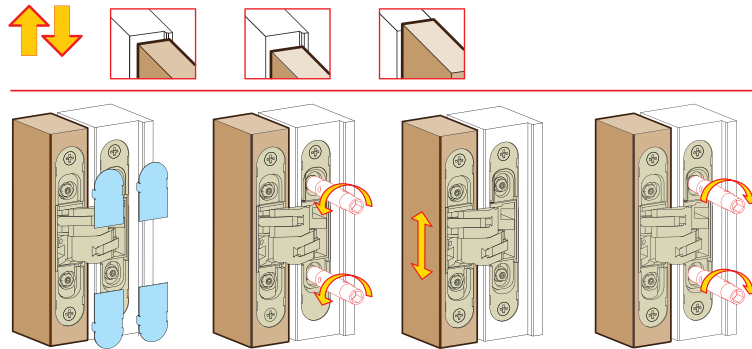

Horizontal adjustment

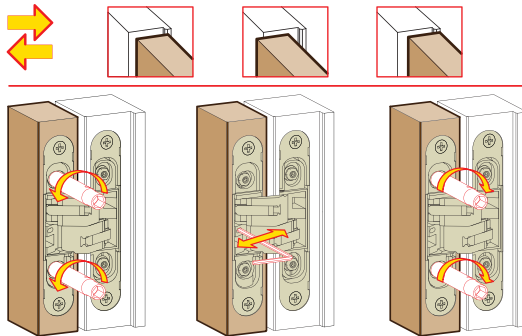

Depth adjustment

